


**ODYSSEY MARKETING**  
**Hx242 Dragonfly**


**ROTORS REMOVAL INSTRUCTIONS**




1) Locate the plastic stopper, which is at the end of the shaft. Gently pull the stopper out the shaft.

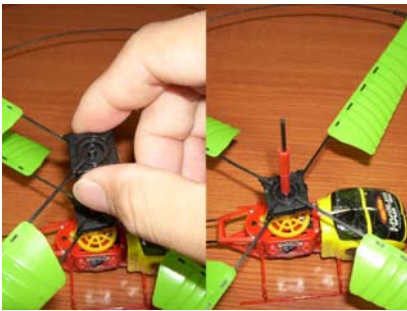

2) Next remove the top rotors, by just gently lift it out from the shaft of the helicopter.

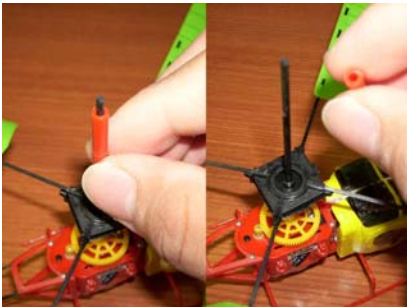

3) Remove the spacers, just lift it out from the shaft of the helicopter.

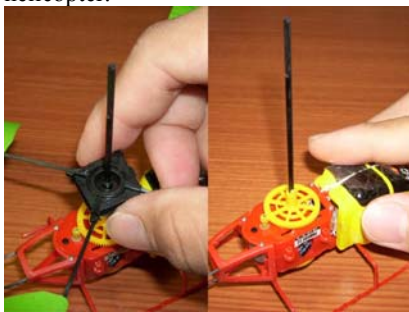

4) Remove the bottom rotors, by just gently lift it out from the shaft of the helicopter. That completes the removal of the rotors.

**Please note that the mini-Heli can only be charged AFTER an initial use out of the box because it comes with a charge from the factory. Then it can be recharged with the provided charger. The charging time should never be more than 15 minutes whether or not the charging light goes off on the adapter. As stated in the manual, NEVER LEAVE A CHARGING HELICOPTER UNATTENDED as this could be a hazard**

**ROTORS INSTALLATION INSTRUCTIONS**



5) Select the appropriate bottom rotor as shown in the picture the jagged end. With the jagged end in first, slot the rotors into the shaft. Ensure that the jagged end of the rotors match up with the gears with is holding the rotors.



6) Insert the all spacers into the shaft.



7) Select the remaining top rotor as shown in the picture. With the protruded end in first, slot the rotors into the shaft.



8) Using the plastic stopper, insert it fully into the end of the shaft. That completes the installation of the new rotors.